Valve systems ► Standardized valve systems

5/2-directional valve, Series 581, size 4

► Qn = 6000 l/min ► plate connection ► Pilot valve width: 30 mm ► compressed air connection output: Base plate ISO 5599-1 ► Basic valve for CNOMO pilot valve; with differential piston ► suitable for ATEX

00133541

Standards	ISO 5599-1
ATEX	2G Ex mb II T42D Ex tD A21 T130°C
Version	Spool valve
Pilot	External, internal
Sealing principle	Soft sealing
Blocking principle	Single base plate principle
Working pressure min./max.	-0.95 bar / 16 bar
Ambient temperature min./max.	-20°C / +70°C
Medium temperature min./max.	-20°C / +70°C
Medium	Compressed air
Max. particle size	50 µm
Oil content of compressed air	0 mg/m³ - 5 mg/m³
version pneumatic port	according to ISO 5599
Protection classwith electrical connector/plug	IP65
Duty cycle	100 %
Mounting screw	with hexagon socket
mounting screw tightening torque	10 Nm
Materials:	
Housing	Aluminum
Seals	Acrylonitrile Butadiene Rubber

Technical Remarks

- The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!
- The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C.
- The oil content of compressed air must remain constant during the life cycle.
- Use only the approved oils from AVENTICS, see chapter „Technical information“.
- * Note: ATEX version can be produced by combining the basic valve without coil with a series DO30 CNOMO pilot valve and an ATEX coil.ATEX ID: see ATEX coils catalog page.

	Flow conductance	Qn	Control pressure min./max.	Weight	Note	Part No.
	C					
	[l/(s*bar)]	[l/min]	[bar]	[kg]		
	24.5	6000	1.5 / 16	1.28	1); 2)	5814680000
	24.5	6000	1.5 / 16	1.28	1); 2); 3)	5814681000

1) The pilot can be set by turning the seal under the valve cover by 180°.
2) For internal pilot the working pressure min/max is the same as the control pressure min/max.
3) with throttle
Basic valve without pilot valve
The minimum pilot pressure is dependent on the pressure in port 1.
Differential piston, signal 14 has priority
Nominal flow Qn at 6 bar and Δp = 1 bar

5/2-directional valve, Series 581, size 4

► Qn = 6000 l/min ► plate connection ► Pilot valve width: 30 mm ► compressed air connection output: Base plate ISO 5599-1 ► Basic valve for CNOMO pilot valve; with differential piston ► suitable for ATEX

Dimensions

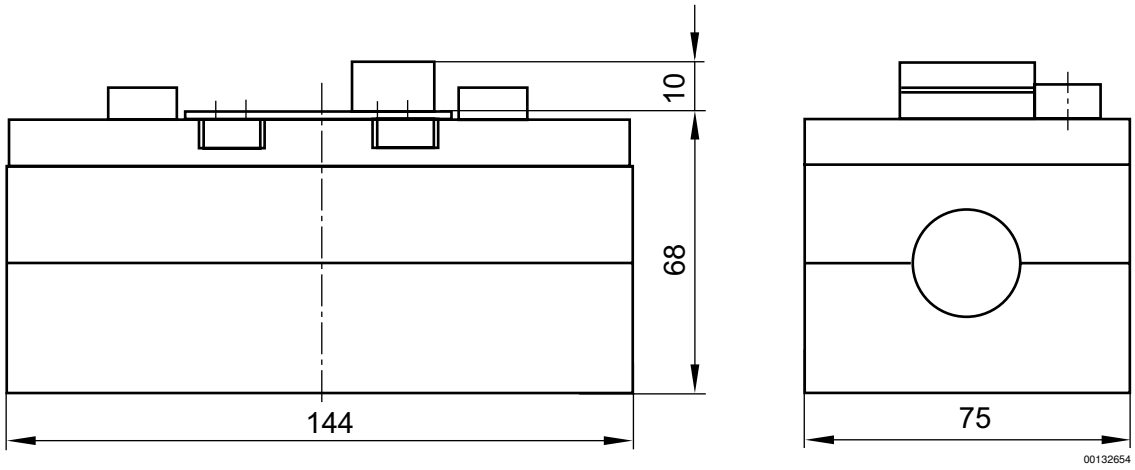

Part numbers marked in bold are available from the central warehouse in Germany, see the shopping basket for more detailed information
Pneumatics catalog, online PDF, as of 2014-10-14, ©AVENTICS S.a.r.l., subject to change